

4,625" Releasable Overshot

Description

This overshot is designed to withstand jarring forces experienced during fishing operations.


To release from the fish, jar down and shear pins inserted to match the down forces. The shear-pin on this overshot is located in the top-sub. This requires no contact with the inner core to be able to release, and you will be able to release and retrieve the tool in most situations.

All components has been exposed to comprehensive testing to provide a safe controlled release of downhole equipment.

The overshot can be supplied with different grapples making it possible to engage fishes from 2,875" to 3,25"

Specifications

Tool OD	4,625 in / 117,48 mm
Tool length	34,84 in / 885 mm
Tool Weight	59,4 lbs / 27 kg
Fishing neck	2,31 in / 58,67 mm
Top connection	2-1/2" QLS
Metal quality	Standard Service
Minimum tensile rating	89 Klbs / 40454 kg
Reach	55 mm – 185 mm
Grapple range	2,875" – 3,25"
IFS Part Nr	3177889

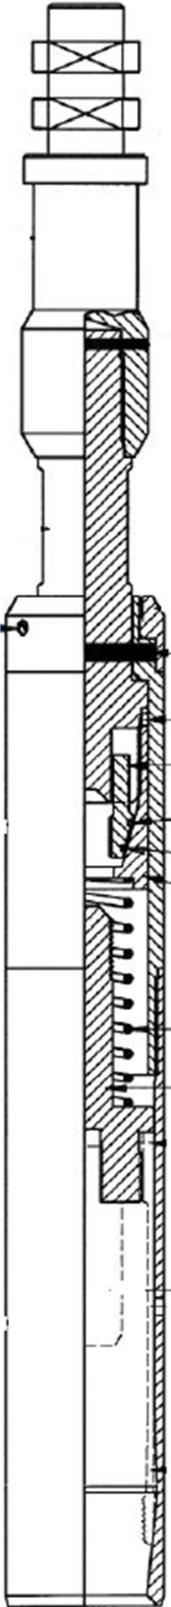

Archer

Archer

Finnestadveien 24
P.O. Box 338
N-4002 Stavanger
Norway
Tel: +4751308000
archerwell.com