

2.75" Releasable Overshot

Description

This overshot is designed to withstand jarring forces experienced during fishing operations.

To release from the fish, jar down and shear pins inserted to match the down forces. The shear-pin on this overshot is located in the top-sub. This requires no contact with the inner core to be able to release, and you will be able to release and retrieve the tool in most situations.

All components has been exposed to comprehensive testing to provide a safe controlled release of down hole equipment.

The overshot can be supplied with different grapples making it possible to engage fishes from 1,04" to 2,03"

The overshot will preferably be run with a Bell Guide to help guide the fish into the overshot. This will give the tool a bigger OD depending on the Bell Guide applied.


Specifications

Tool OD	2,795 in / 70,99 mm
Tool length	30,1 in / 764,54 mm
Tool Weight	35,2 lbs / 16 kg
Fishing neck	2,31 in / 58,67 mm
Top connection	2-1/2" QLS
Metal quality	Standard Service
Minimum tensile rating	89 Klbs / 40454 kg
Reach	32 mm – 140 mm (740mm reach with extender)
Grapple range	1,04" – 2,03"
Available Bell Guides	2,75" - 5"
IFS Part Nr	1306662

Archer

Archer

Finnestadveien 24
P.O. Box 338
N-4002 Stavanger
Norway
Tel: +4751308000
archerwell.com

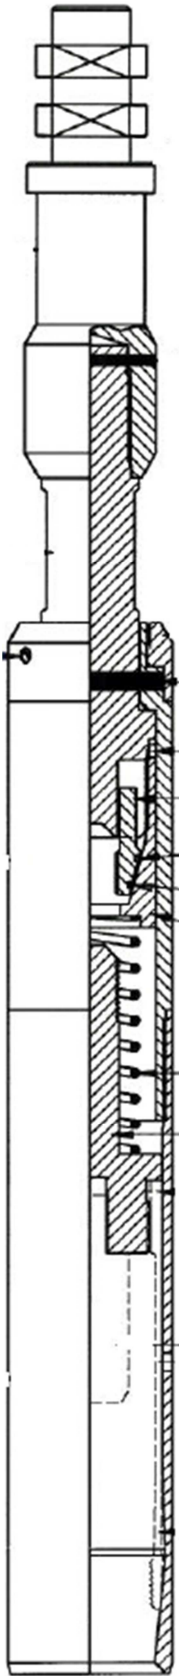

Archer

Archer

Finnestadveien 24
P.O. Box 338
N-4002 Stavanger
Norway
Tel: +4751308000
archerwell.com